

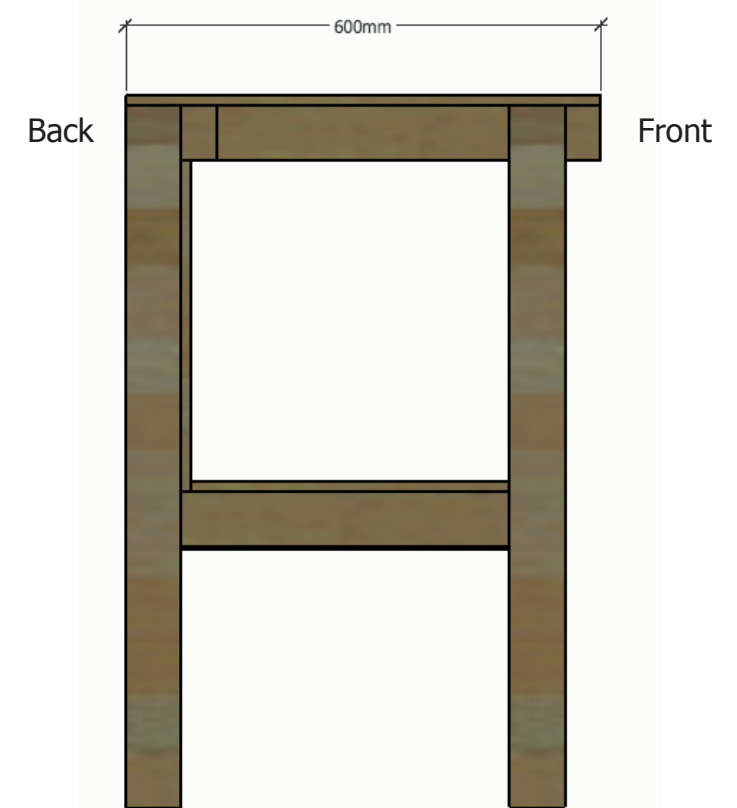
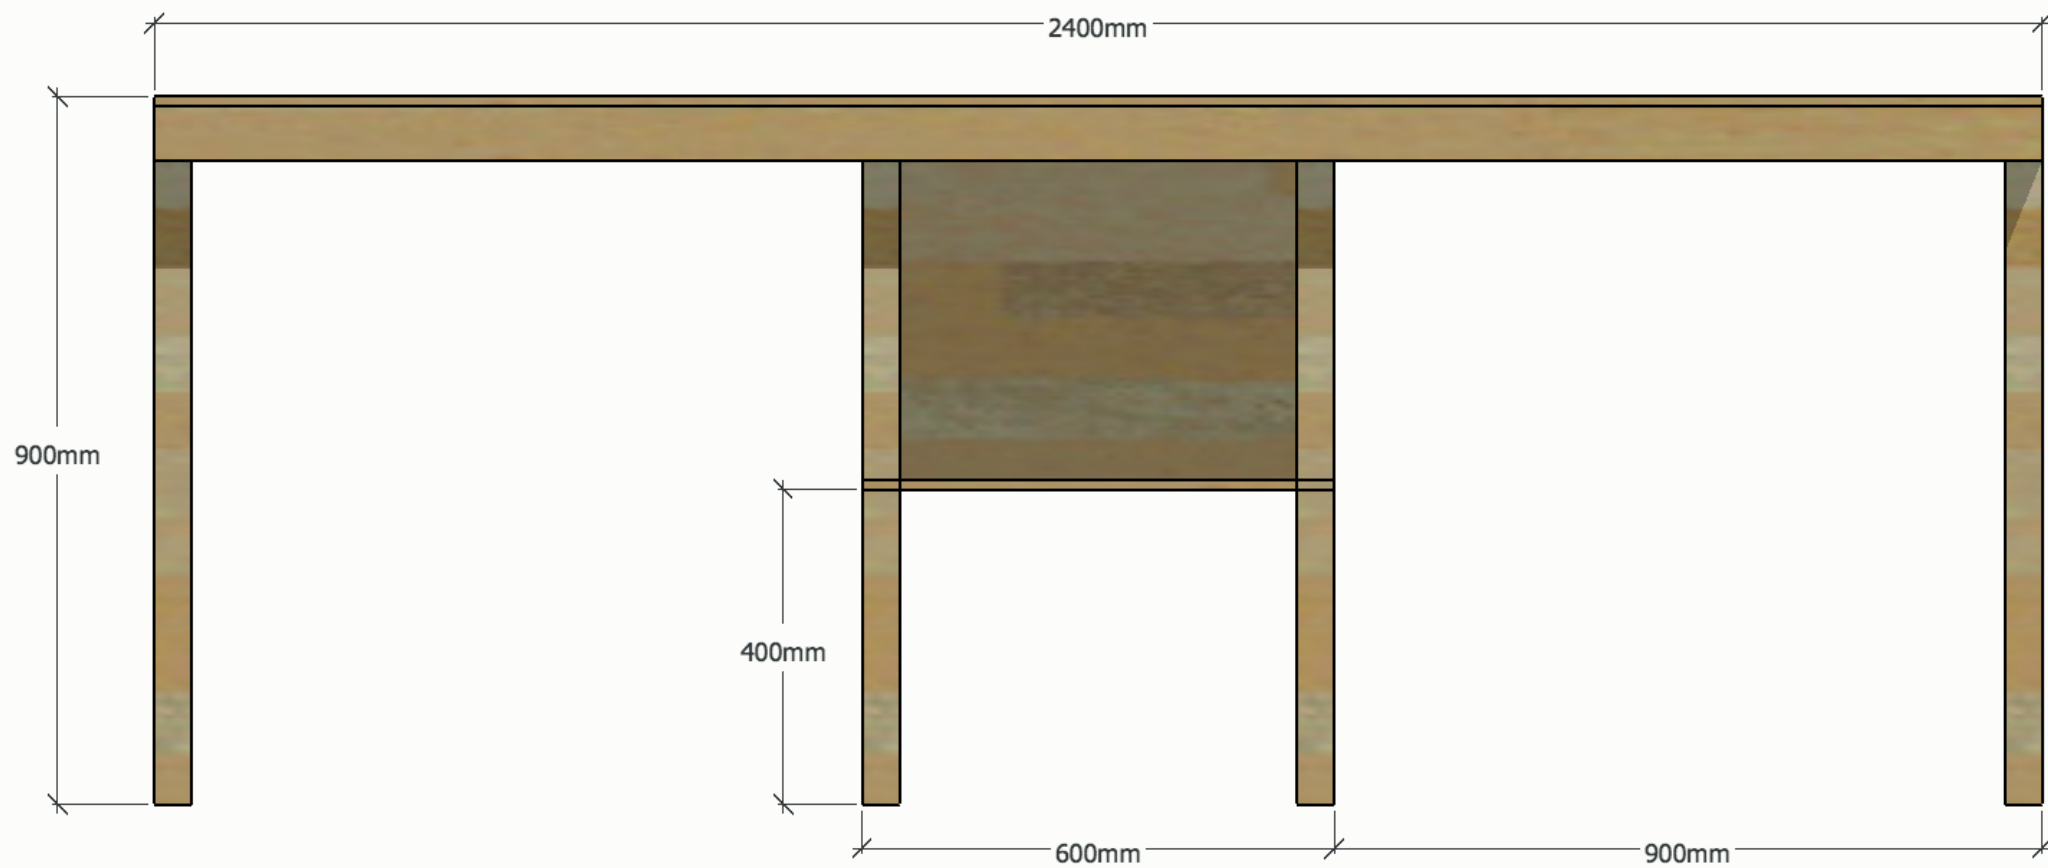


Side Bench | Overview

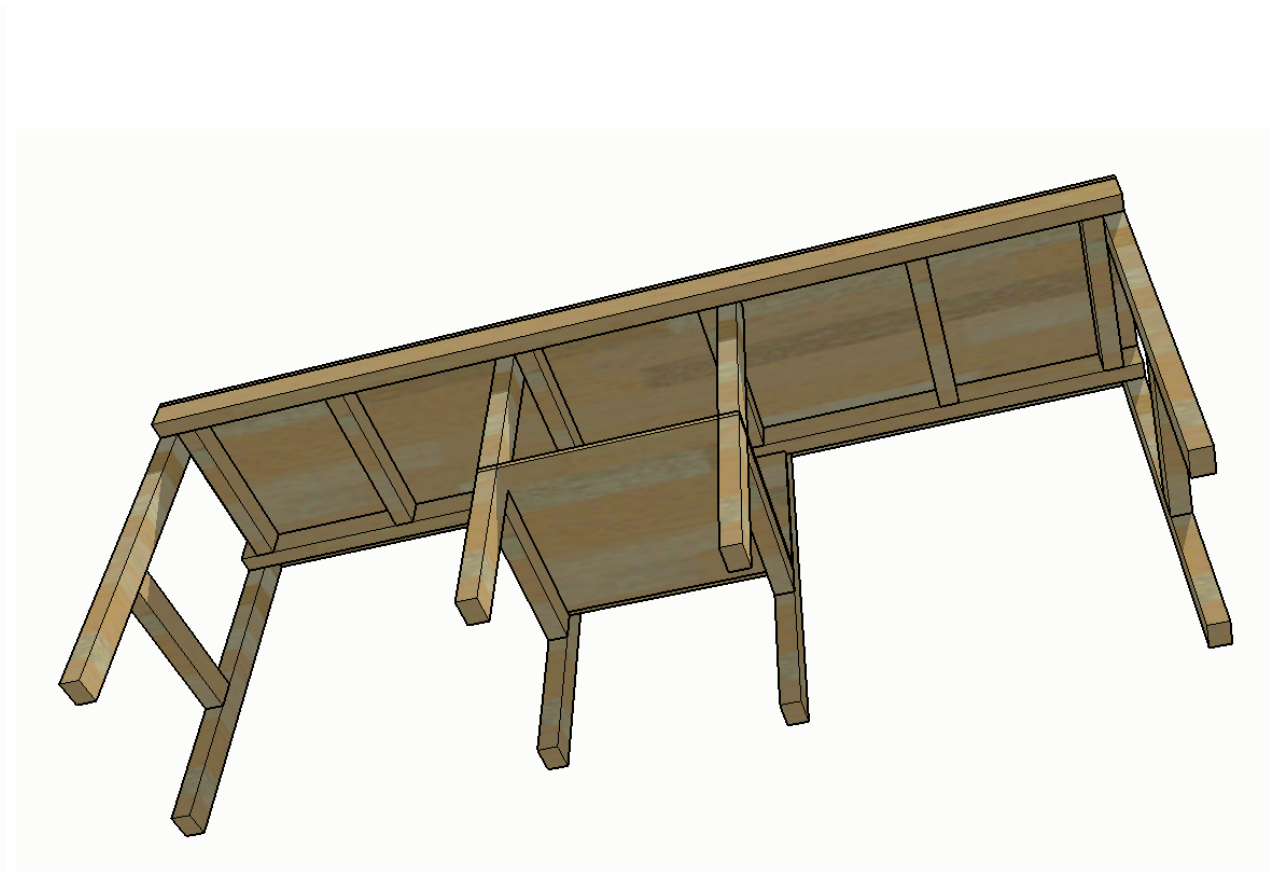


Side Bench | Cutting Instructions

1x 1220x2440x12 Ply

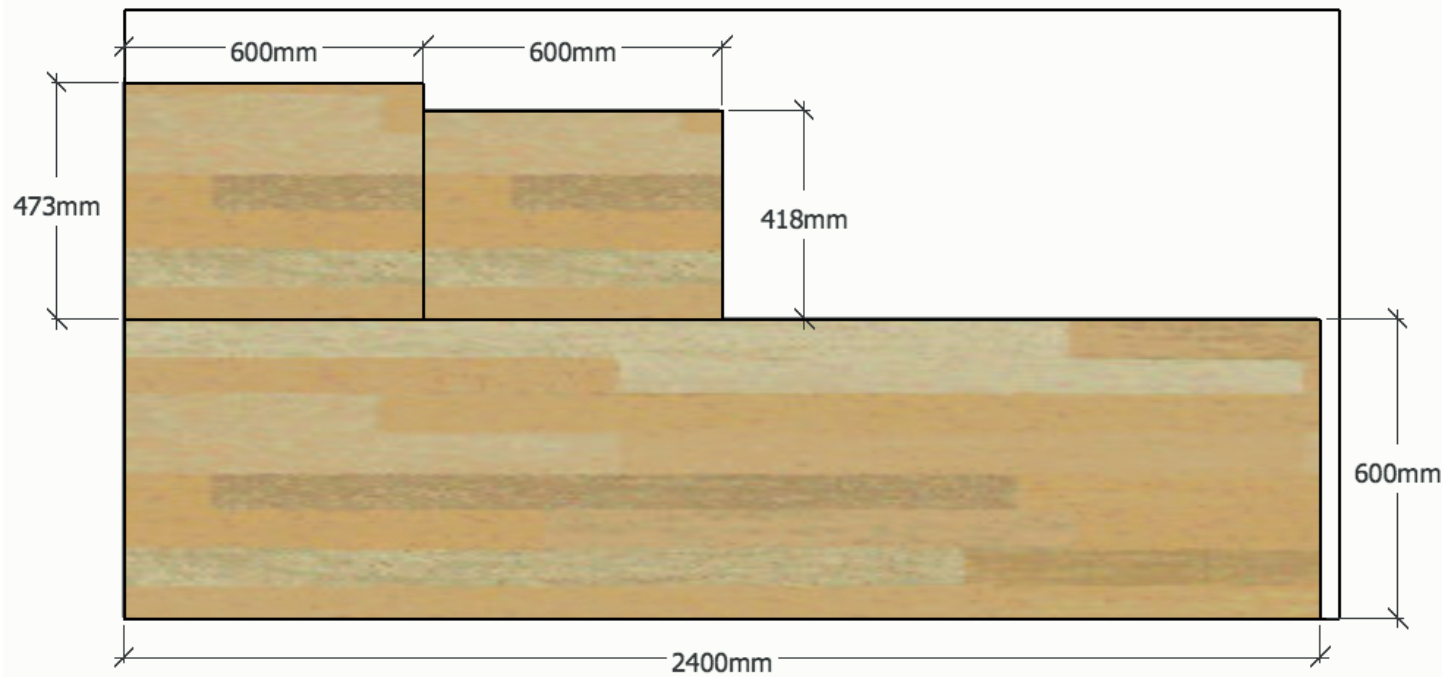

1. Long cut at 600mm from outside edge
 - 1.1. Trim to 2400 length, resulting 2400 x 600 board is the top surface of the bench
2. Split remaining board at 1203mm from short edge
 - 2.1. Split one of the remaining boards again into two ~ 600 x 600 pieces
 - 2.2. Trim to match dimensions above, resulting pieces form the under-bench storage shelf and backboard

8x 38x63x2400 CSL Studding

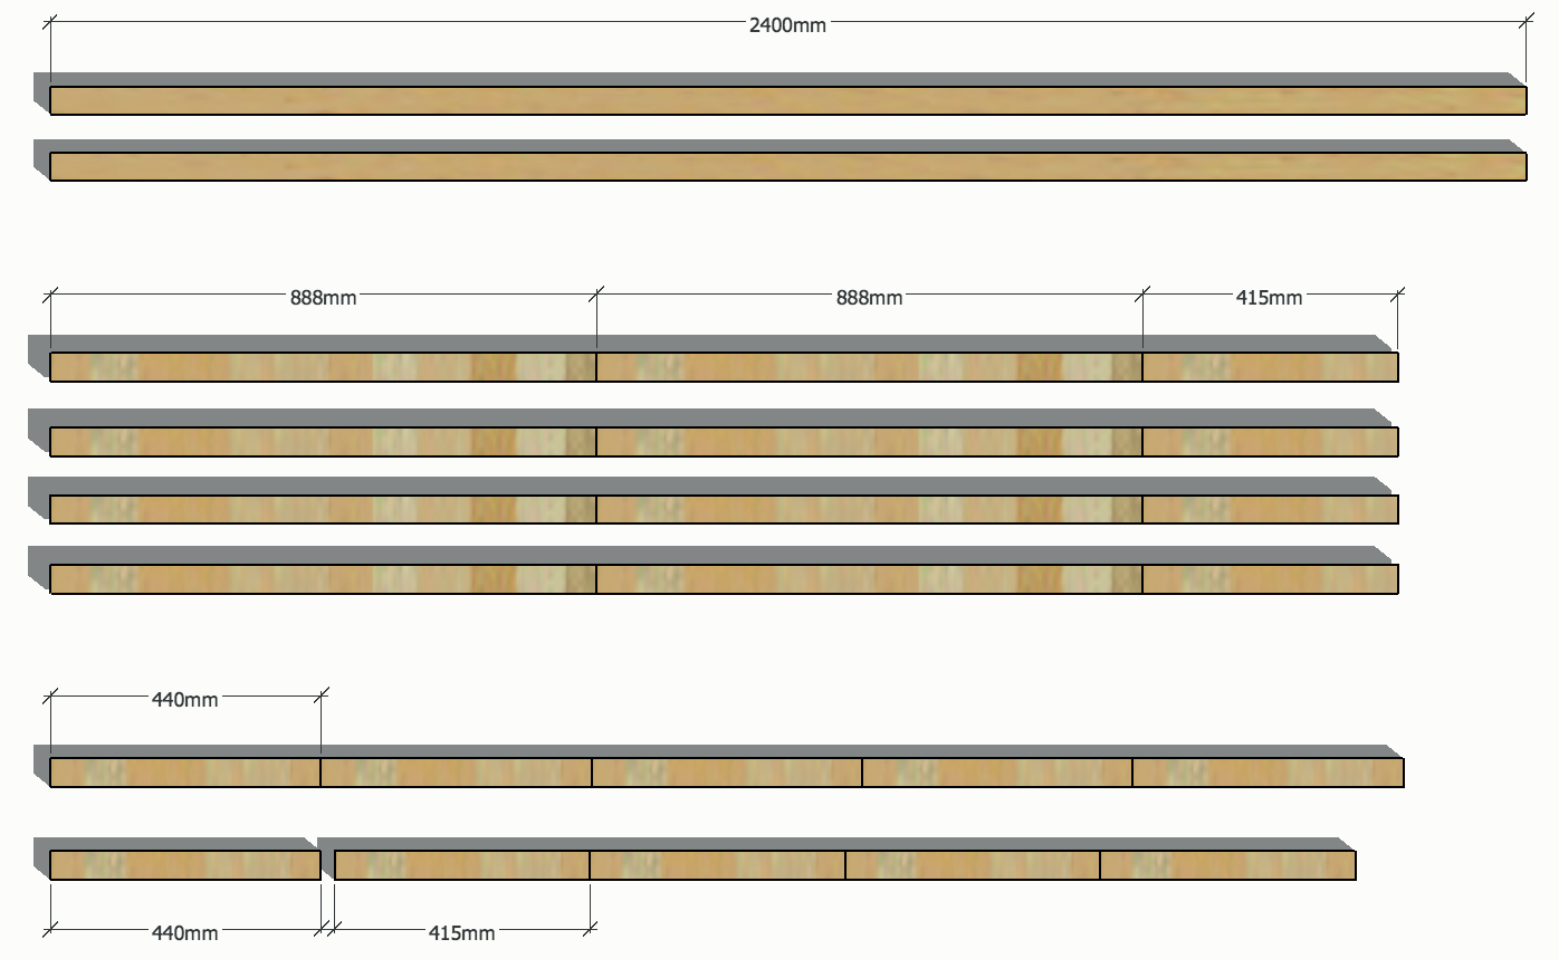


1. Cut studding to lengths shown


Resulting lengths:

2x	2400	rails
8x	888	legs
6x	440	stretches on underside of benchtop
4x	415	stretchers between legs


Side Bench | Assembly Instructions

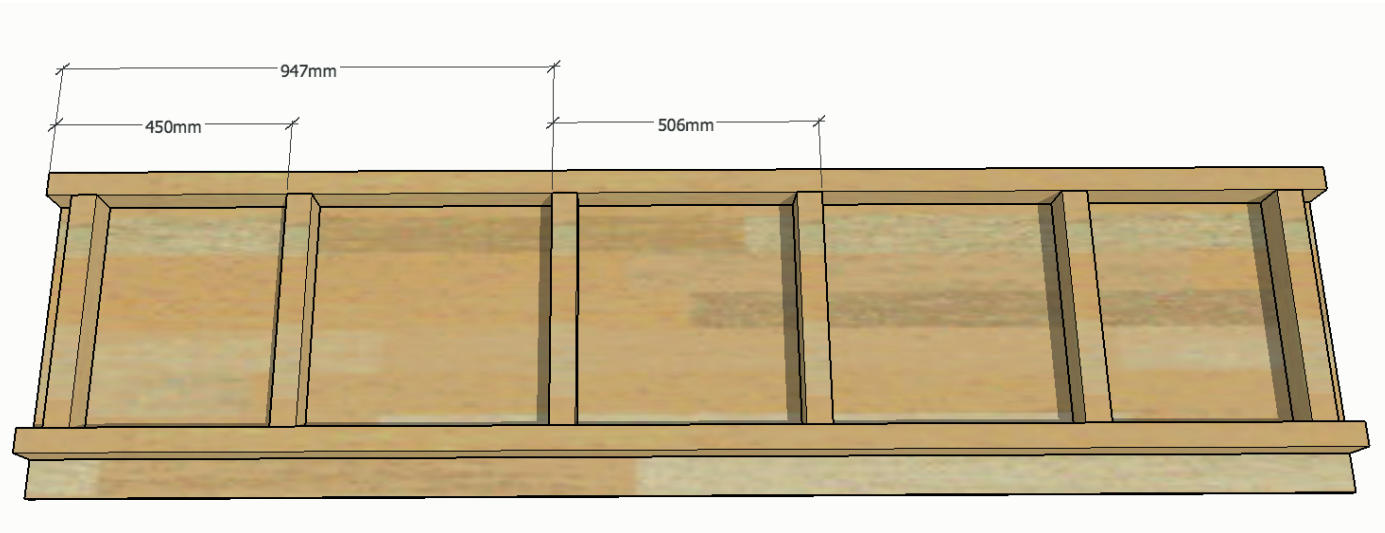

1. Assemble the bench top as per diagram above
- Use a spare leg to space out outer stretchers correctly

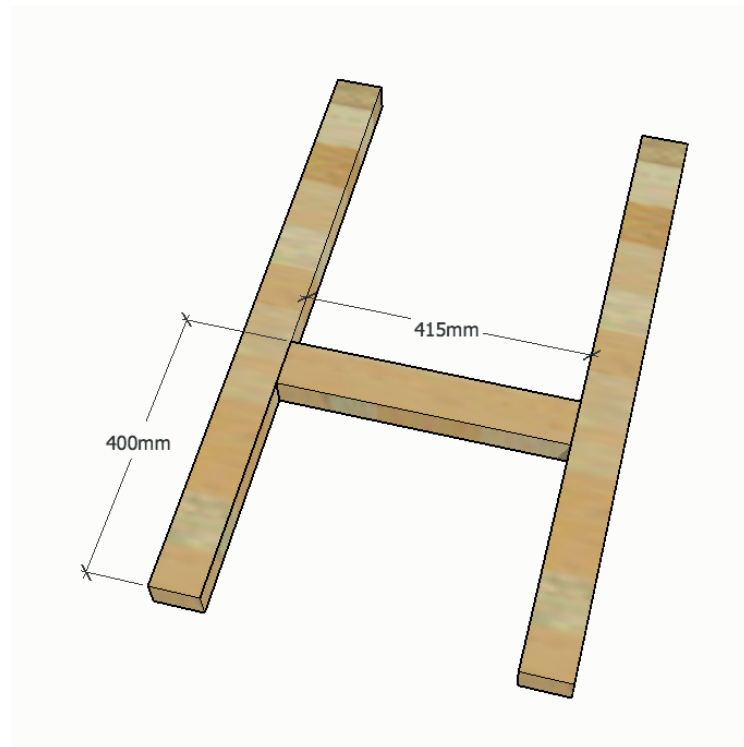

2. Assemble 4x sets of legs as per diagram above
- Use pillar drill to set pilot holes through legs for stretchers - 2 per end

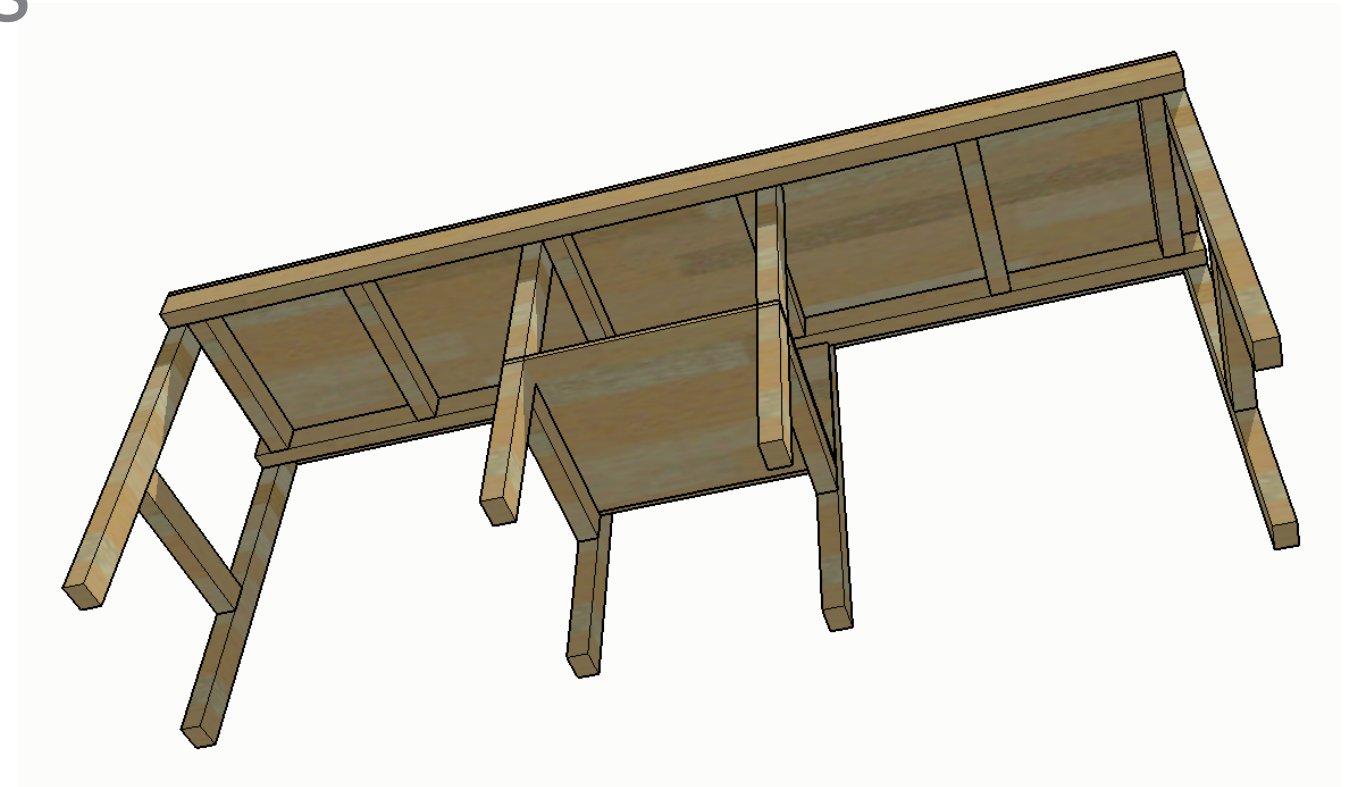

3. Attach legs to benchtop
4. Attach back panel
5. Notch shelf around legs and attach to stretchers
6. Varnish top surface of bench (2 coats)